

PROTERMINAL



DESCRIPTION

PROTERMINAL is a “L-shaped” profile for finishing and protecting the edges of tiled floor and the external corners of tiled wall. It can be also used to close the perimeter of coverings, like connection profile between step tread and riser of stairs coated with ceramic and natural stone tiles, and as separation profile between different floors. Its section and variety of heights and finishes make **PROTERMINAL** an elegant and much sought-after profile.

MATERIAL

PROTERMINAL is a “L-shaped” profile for finishing and protecting the edges of tiled floor and the external corners of tiled wall in anodized, polished and brushed aluminium. It is available in the heights of 3 - 4.5 - 6 - 8 - 10 - 11 - 12.5 - 15 and 20 mm. It has a punched flange that guarantees a perfect grip to the adhesive. The vertical side is internally equipped with grooves to guarantee the grout grip. The high range of finishes and the availability of different heights make **PROTERMINAL** an elegant and much sought-after profile.

AREAS OF USE

PROTERMINAL in anodized, polished and brushed aluminium is suitable for indoor environments where good resistance to mechanical and chemical stress is required.



WARNINGS



Do not use **PROTERMINAL** in anodized, polished and brushed aluminium outdoors and in environments where aggressive substances are used. Clean immediately the surface of the profile from all remains of adhesive or grout after laying; the permanence of these substances on the surface may lead to formation of non-removable aluminium hydroxide (dark halos).

MAINTENANCE

PROTERMINAL does not require any special maintenance. It is suggested to clean it with normal household cleaning products.

INSTALLATION INSTRUCTION

1. Choose “**PROTERMINAL**” according to the tile thickness and desired finish.
2. Cut “**PROTERMINAL**” to the desired length and apply the adhesive on the support where the profile will be laid.
3. Press the “**PROTERMINAL**” anchoring flange into the adhesive.
4. Install the tiles, aligning them with the profile leaving a 2 mm joint. Remove immediately all remains of adhesive from the surface of the profile.
5. Fill the joints between the profile and the tiles with grout to avoid water stagnation. Remove immediately all the remains of grout from the surface of the profile.

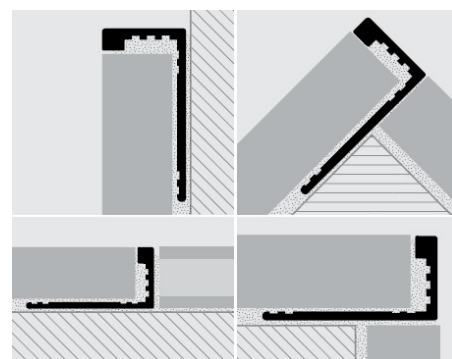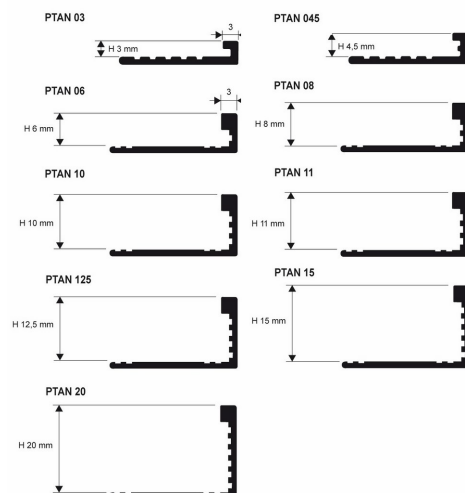

TEXT TEMPLAT FOR TENDERS

Delivery and installation of “L-shaped” profile for finishing and protecting the edges of tiled floor and the external corners of tiled wall in anodized / polished / brushed aluminium with a height of mm and equipped with a punched flange that guarantees a perfect grip to the adhesive. The vertical side is internally equipped with grooves to guarantee the grout grip like **PROTERMINAL** of the Progress Profiles company.

PT... 03/45/06/08/10/125/15/20: Anodized, polished and brushed aluminium.

Profile height : _____ mm
 Profile length : _____ mt
 Material : _____ €/mt
 Application : _____ €/mt
 Total value : _____ €/mt